



Modular Ice Machine up to 680 kg

Item #:
Project:
Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.

Head

NW 1408



NW L 1408 Large Cube 17 g W 29 x D 24 x H 29 mm



NW 1408 Full Cube 12 g W 26,5 x D 26,5 x H 26 mm

NW H 1408 Half Cube 6 g W 13 x D 26,5 x H 26 mm

CONDENSING **SYSTEM**

Air cooled Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

380/50/3

LEGEND:

✓ : Perfect combination between ice maker and bin : Ice chute cut-out performed upon installation CBTxxxxxxxxxx : need additional bin top

RECOMMENDED BINS

SB530

SB948

SB1025

UBH1100

UBH1600

Bins

CBT48EAMCD

CBT52EAMCD

Certifications:

OPERATING REQUIREMENTS

	Minimum	Maximum			
Air temperature	10°C	43°C			
Water temperature	5°C	38°C			
Water pressure	1 bar (14 psi)	5 bar (70 psi)			
Electrical voltage	-10%	+10%			

IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals. Download our free App Scotsman Ice Apple store Google play Windows store

www.scotsman-ice.it www.scotsman-ice.com kg

243

406

478

553

812


NW 1408 EASY





Modular Ice Machine up to 680 kg

Item #: Project: Quantity:

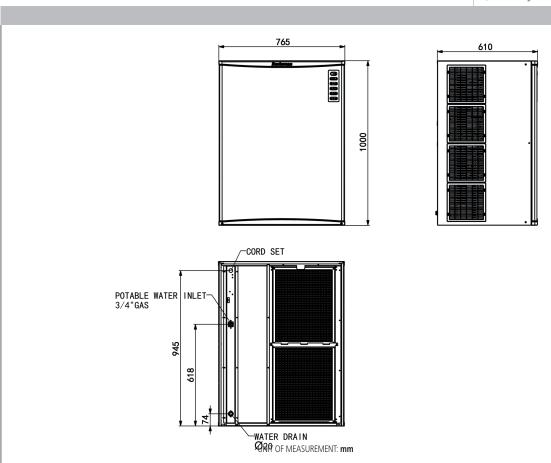

				Compressor		Circuit wires		Max. fuse size
UNIT DATA		Version	Voltage	Btu/h	W	No.	Ømm²	Α
Size (W x D x H)	765 x 610 x 1000 mm	NW 1408 AS	380/50/3	31733	9300	5	2.5	15
Net weight	130 kg	NW H 1408 AS	380/50/3	31733	9300	5	2.5	15
		NW L 1408 AS	380/50/3	31733	9300	5	2.5	15
SHIPPING DATA		NW 1408 WS	380/50/3	31733	9300	5	2.5	15
Carton (W x D x H)	830 x 690 x 1160 mm	NW H 1408 WS	380/50/3	31733	9300	5	2.5	15
Weight	145 kg	NW L 1408 WS	380/50/3	31733	9300	5	2.5	15

		24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power	
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW 1408 AS	Air	380/50/3	650	630	520	13.0	68.0	29.5	3500
NW H 1408 AS	Air	380/50/3	680	650	530	11.4	60.8	31.0	3500
NW L 1408 AS	Air	380/50/3	620	614	470	13.3	64.0	24.4	3500
NW 1408 WS	Water	380/50/3		600	540	13.0	68.0	280.3	3500
NW H 1408 WS	Water	380/50/3		620	550	11.4	60.8	210.2	3500
NW L 1408 WS	Water	380/50/3		580	490	13.3	64.0	219.7	3500

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions